


High Quality Power Dividers made to ensure optimal performance with excellent VSWR and low insertion loss thereby giving precise phase and amplitude balance in a wide bandwidth covering 300 to 500MHz. Available in 2, 3 and 4 way option , this splitter comes complete with IP65 specification enabling it to be used for outdoor application as well.

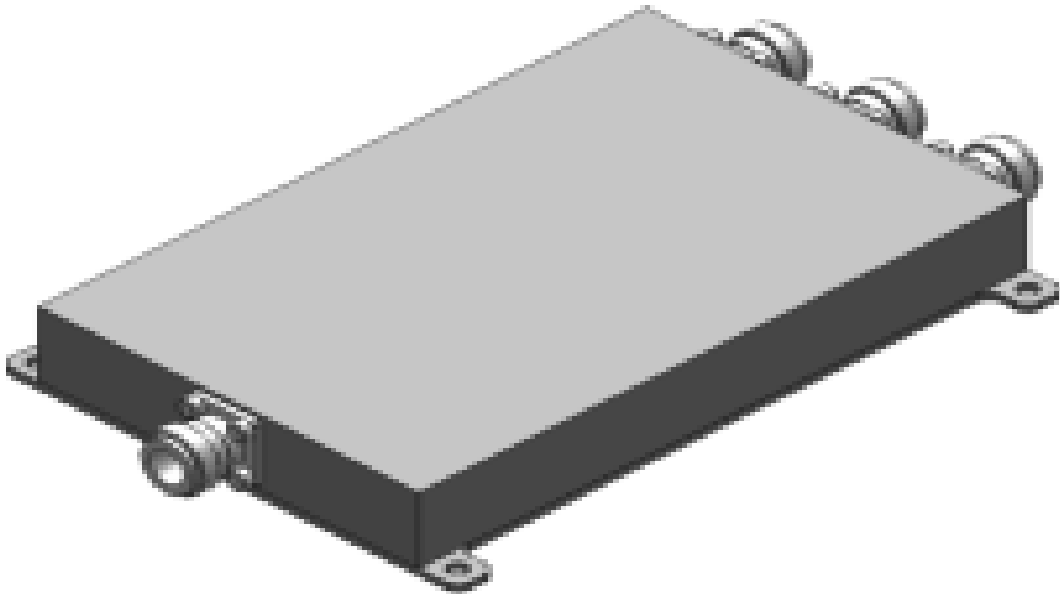

Model	PS2N-K3050/P50	PS3N-K3050/P50	PS4N-K3050/P50
Type	2 way divide	3 way divide	4 way divide
Frequency	300-500MHz		
VSWR for full bandwidth	<1.20:1		
Insertion Loss	<0.3dB	<0.5dB	<0.4dB
Isolation	20dB min.		
Impedance	50 ohms		
Input Power	50 Watt		
Operating Temperature	-30°C ~ +60°C		
Connector	N Female		
Dimension (Overall)	148 x 90 x 22mm	194 x 119 x 22mm	176 x 141 x 22mm
Weight	0.40KG	0.72KG	0.80KG