


High Quality Power Dividers made to ensure optimal performance with excellent VSWR and low insertion loss thereby giving precise phase and amplitude balance in a wide bandwidth covering 300 to 960MHz. Available in 2, 3 and 4 way option , this splitter comes complete with IP65 specification enabling it to be used for outdoor application as well.

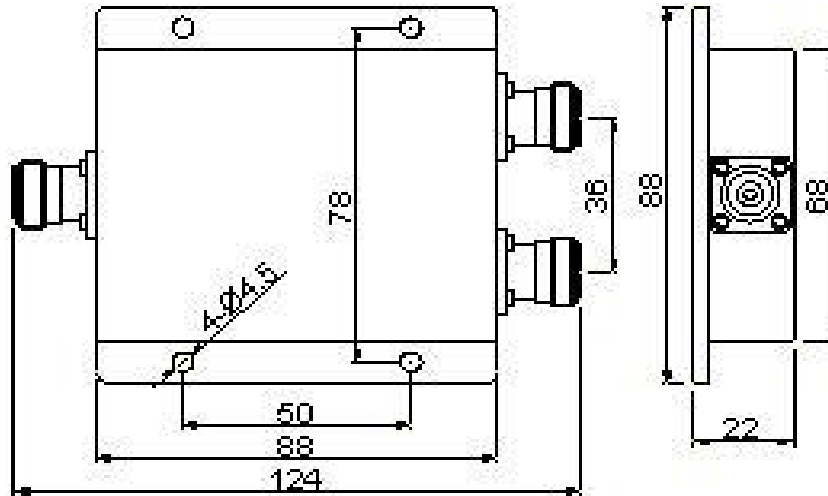

Model	PS2N-K3096/P50	PS3N-K3096/P50	PS4N-K30960/P50
Type	2 way divide	3 way divide	4 way divide
Frequency		300-960MHz	
VSWR for full bandwidth		<1.35:1	
Insertion Loss	<0.3dB	<0.5dB	<0.4dB
Isolation		20dB min.	
Impedance		50 ohms	
Input Power		50 Watt	
Operating Temperature		-30°C ~ +60°C	
Connector		N Female	
Dimension (Overall)	124 x 88 x 22mm	175 x 117 x 22mm	173 x 147 x 22mm
Weight	0.33KG	0.62KG	0.80KG