

On-Glass Mobile Antenna for GSM 900 MHz

TG 900 1/4 p/n 2215006.93

TG 900 C p/n 2215106.93

Electrical Data:


Type:	TG 900 1/4: 1/4 TG 900 C: 1/4 + 5/8 colinear
Frequency Range:	880-960 MHz
Impedance:	50 Unbalanced
Polarization:	Linear Vertical
Gain:	TG 900 1/4: 0 dB ref. to /4 on glass TG 900 C: 3.5 dB ref. to /4 on glass
V.S.W.R.:	TG 900 1/4: 1.8:1 TG 900 C: 2.2:1
Max Power:	20 Watts (CW) at 50° C
Lightning protection:	DC-ground
Connector:	FME-male

Mechanical Data:

Housing Materials:	ABS, Stainless Steel 17/7 PH
Height (approx.):	TG 900 1/4: 90 mm TG 900 C: 340 mm
Weight (approx.):	TG 900 1/4: 45 gr TG 900 C: 60 gr
Mounting:	"On-glass"



TYPICAL S.W.R. RESPONSE

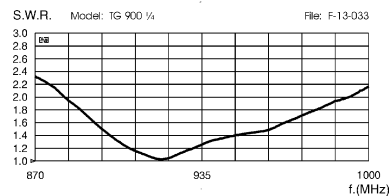

TYPICAL S.W.R. RESPONSE

