SPO 2 m Series 5 dBi Sirio Professional Omni VHF Base Station Antennas 135-175 MHz

DESCRIPTION: New series of wide band omnidirectional base station antennas for VHF band suitable for marine service too. The fiberglass protection radome and the anodized aluminium parts guarantee robustness and long life to all the SPO-antennas series. They are supplied with two strong extruded aluminium brackets and stainless steel hardware for a good installation on the mast.


Electrical Data

Model	SPO 135-5	SPO 145-5	SPO 150-5	SPO 158-5		
Туре	Col <mark>n</mark> ear					
Frequency Range	135-147 MHz	145-160 MH	z 150-165 MHz	158-175 MHz		
	@ SW/R 1.5	@ SW/R 1.5	@ SWR 1.5	@ SWR 1.5		
Impedance	50					
Radiation (H-plane)	360° Omnidirectional					
Radiation (E-plane)	Beamwidth @ -3dB = 40°					
Radiation angle deg.	0°					
Polarization	Linear Vertical					
Gain	3 dBd - 5.15 dBi					
Max Power	100 Watts (CW) @ 30°C ambient					
Grounding Protection	All metal parts are DC-grounded,					
	inner conductor shows a DC short					
Connector	N-female, with rubber protection cap					

Mechanical Data

Materials	White fiberglass radome 28.6 mm, anodized 6063-T5				
	aluminium, brass, stainless steel, copper, EPDM rubber.				
Wind Load at 150 km/h	104 N	98 N	98 N	93 N	
Wind Resistance	150 Km/h				
Wind Surface	0.089 m ²	0.083 m ²	0.083 m ²	0.078 m ²	
Operatin temperature	-40°C to + 80°C				
Height (approx.)	2940 mm	2740 mm	2740 mm	2590 mm	
Weight (approx.)	2160 gr	2045 gr	2000 gr	1950 gr	
Mounting Mast	Side mast with "V" bolt, 35-54 mm				




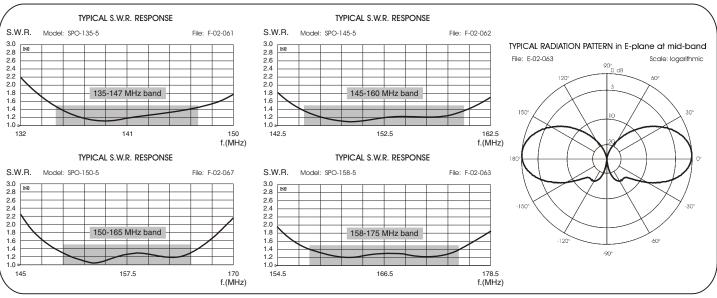



HI-QUALITY ANTENNAS MADE IN ITALY

MOUNTING INSTRUCTIONS

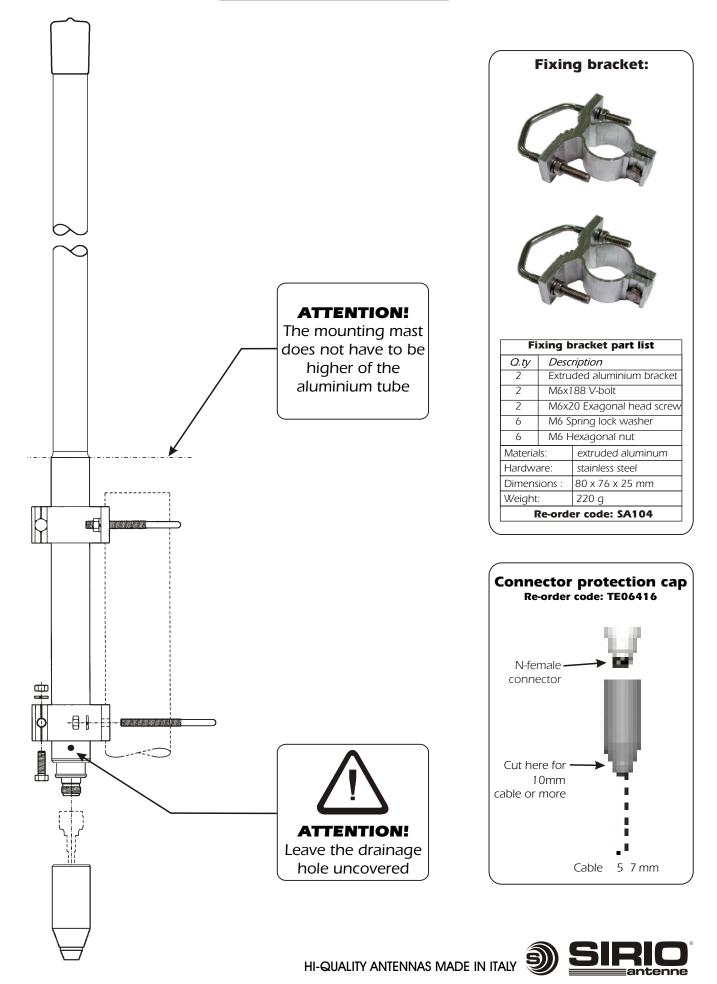

© Copyright SIRIO antenne - Technical Data are subjected to change - Printed in ITALY - Rev. 30/07/2009 - Cod. ID383