


TYPICAL RADIATION PATTERN in E-plane at 880 MHz

File: E-04-009


Scale: linear

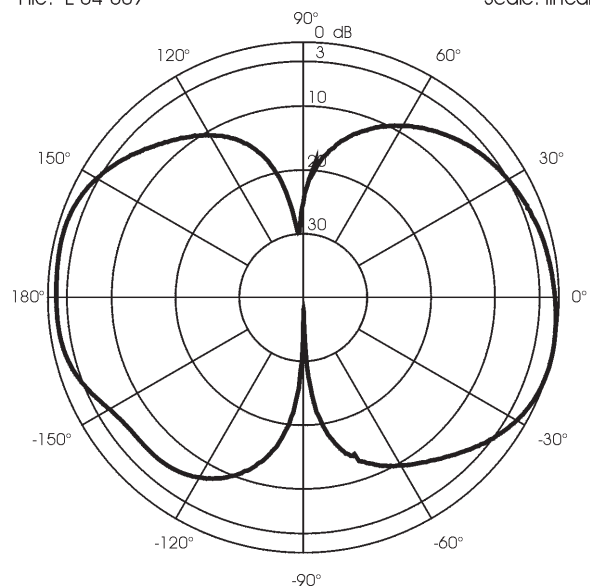

TYPICAL RADIATION PATTERN in E-plane at 1710 MHz

File: E-04-009

Scale: linear

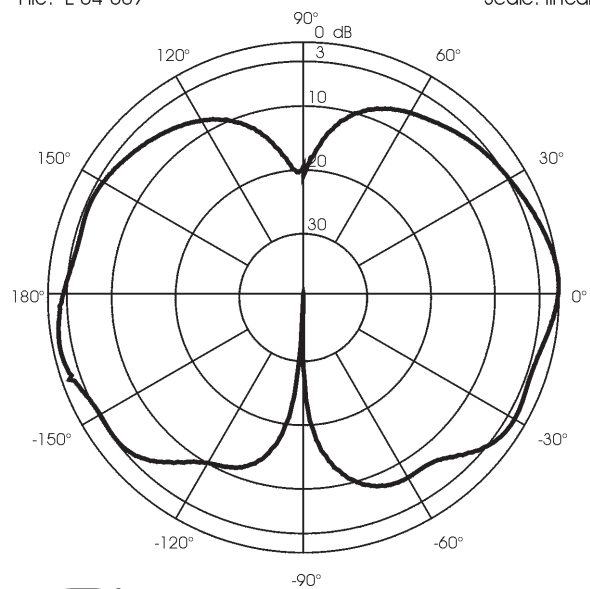

Model **SO-918-2**

Base Station Dual-Band Antenna (GSM,DCS,DECT,UMTS)



HI-QUALITY ANTENNAS MADE IN ITALY

© Copyright SIRIO antennae - Technical Data are subjected to change - Printed in ITALY - Rev. 07/06/2005 - Cod. ID293

Installation Manual

DESCRIPTION

Dual-band base station antenna conceived for GSM 900 & 1800, DCS 1.9, DECT and UMTS working on 880-960 MHz and 1710-2170 MHz. The radiant dipole is realized on Microstrip PCB and protected by a glassfiber tube.

SPECIFICATIONS


Electrical Data

Type	:	Dipole
Frequency Range	:	880-960 MHz 1710-2170 MHz
Impedance	:	50 Ω Unbalanced
Polarization	:	Linear Vertical
Gain	:	0 dBd, 2.15 dBi at both band
3 dB Beamwidth Vertical	:	E-plane 50°
Beamwidth Horizontal	:	H-plane 360° Omnidirectional
Downtilt	:	0°
S.W.R. in Bandwidth	:	$\leq 2:1$
Max Power	:	20 Watts (CW) at 50° C
Feed System / Position	:	Direct / Base
Connector type	:	N female


Mechanical Data

Housing Materials	:	Aluminium, Chromed brass, PCB, Stainless Steel
Radome Material	:	White Glassfiber
Wind Load / Resistance	:	11 N at 150 Km/h / 200 Km/h
Wind Surface	:	0.01 m ²
Height (approx.)	:	325 mm
Weight (approx.)	:	350 gr
Operating Temperature	:	-20° C to 80° C
Mounting Mast Diameter	:	Ø 35-54 mm

TYPICAL S.W.R. RESPONSE

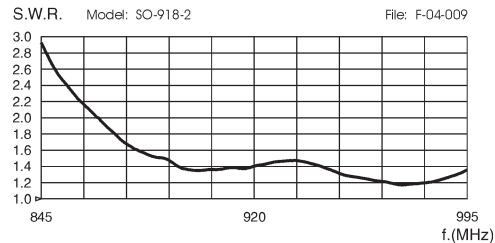

TYPICAL S.W.R. RESPONSE

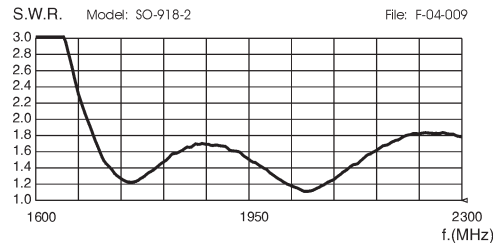

MOUNTING INSTRUCTIONS

