


KAD - UHF

*FIBRA DE VIDRIO
FIBRE GLASS*

MOD.	FRECUENCIA/FREQUENCY
KAD 400	396 - 412 Mhz
KAD 420	412 - 430 Mhz
KAD 440	430 - 450 Mhz
KAD 460	450 - 470 Mhz
KAD 480	470 - 490 Mhz
KAD 500	490 - 510 Mhz

*ACERO INOXIDABLE
STAINLESS STEEL*

**CONECTOR N HEMBRA
N FEMALE CONNECTOR**

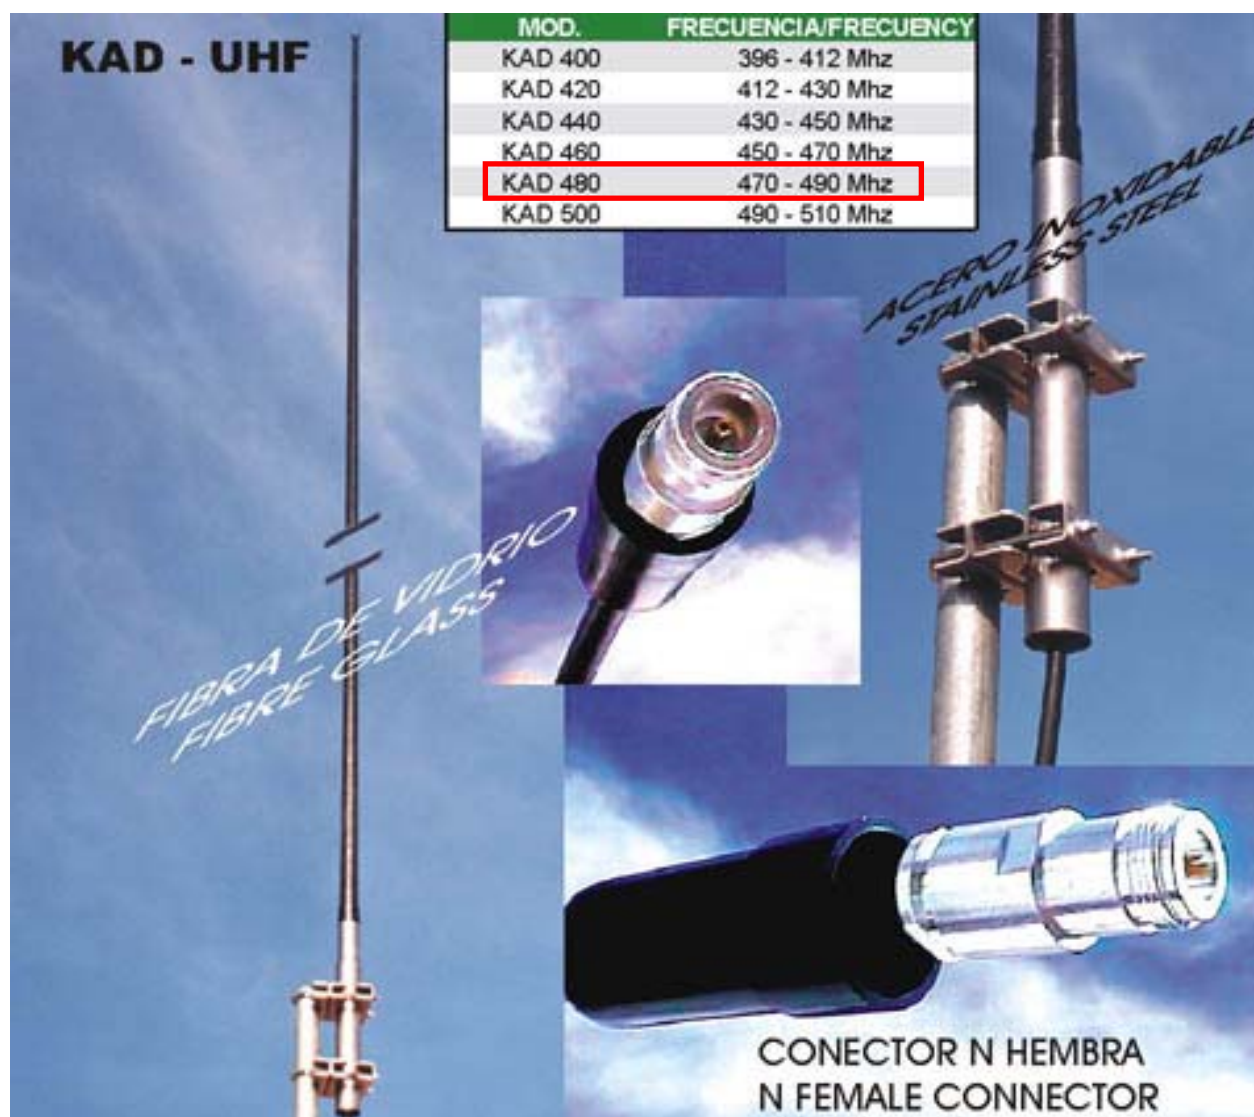

KAD-UHF	
Tipo - Type	Dipolo colineal-Colinear dipole
Frecuencia - Frequency	Ver tabla adjunta1/ See table
Potencia - Power	150W
Ganancia - Gain (dB)	5.5 dBd (7.65 dBi)
Polarización - Polarization	Vertical
Impedancia - Impedance	50 ohm
Tipo de ajuste - Adjust type	Ajustada / Adjusted
R.O.E - S.W.R	1:1,2
Ø mástil - mast (mm)	30-45
Longitud radiante - Radiator Length (mm)	2840
Tipo de conector - Type of connection	N Hembra / Female
Peso bruto - Gross weight (gr.)	1620
Dimensiones - Packages dimensions (cm)	Tubo / Tube Ø10 x 300