


# Lightning Arrestor for Bluewave Antenna Series

Patented protection for single or multi-channel transmitters and/or receivers. One of the industry’s BEST RF performance, fully weatherized, compact integrated connector housing, Industry’s lowest throughput energy, maintenance free, and multi-strike compatible for 2.0-6.0 GHz. Weatherproof when installed.

The BWS26 is UL approved and listed (UL497B).

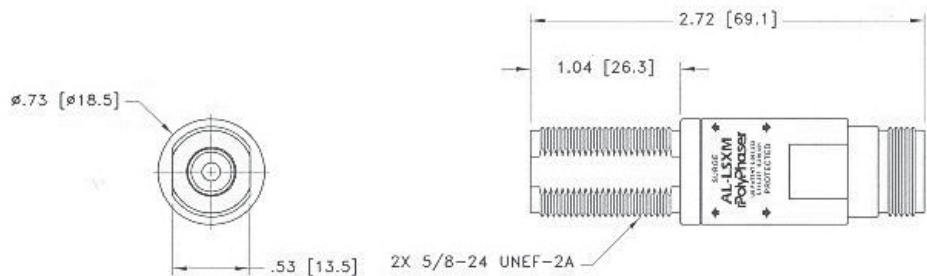

## Technical Data

Application: DC Blocked RF
Maximum Power: 10 watts
Unit Impedance: 50 Ω
Thoroughput Energy: ≤ 0.5000 μJ
Connector: NF to NF
Mounting: Bulkhead

## Mechanical Specifications

Model	Frequency Range	VSWR	Insertion Loss
BWS26	2.0-6.0 GHz	1.3:1	0.1 dB