

全頻段DCS室內型增波器


體積小,重量輕,低耗電

內置AGC電路

高輸出功率 涵蓋面積大

DSP增益控制

壁掛式設計 安裝容易

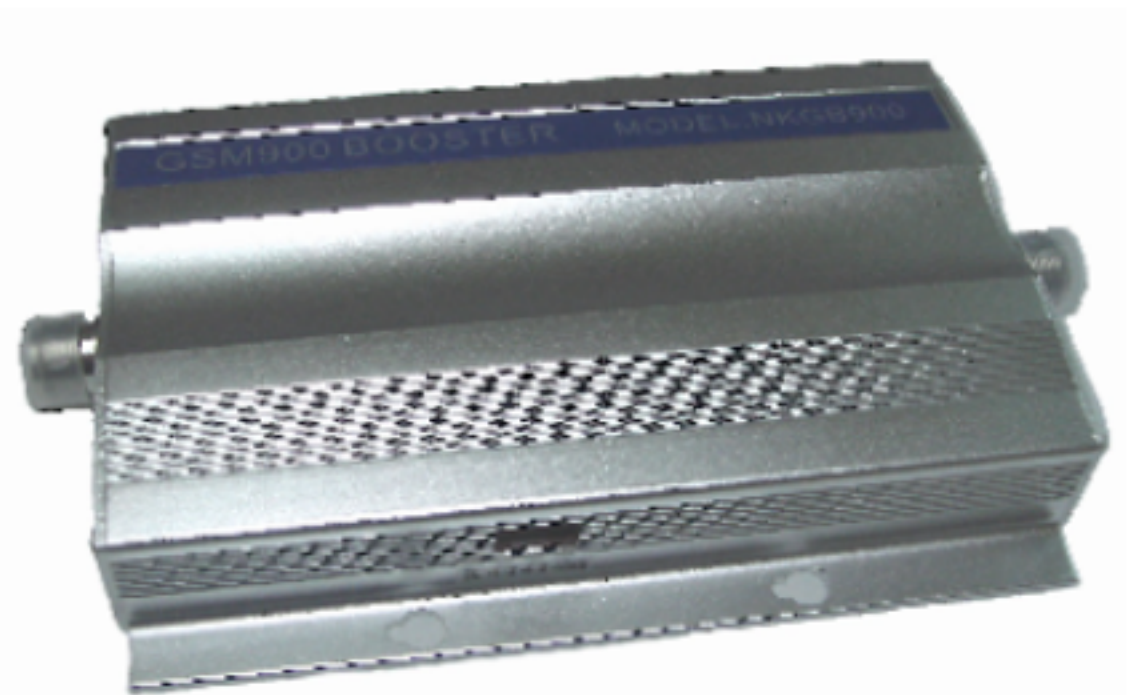

PARAMETER	VALUE
Frequency Range Unlink	1710 ~ 1765 MHz
Frequency Range Downlink	1805 ~ 1865 MHz
Bandwidth	55 MHz
Gain Range	≥ 60dB
AGC	≥ 10dB
Output Power	>8dBm (Input -50dBm)
1 dB Compression Point	≥ 18dBm
Spurious Emission (at 0dBm pout @1CH)	≤ -36dBm (9kHz ~ 1GHz)
	≤ -30dBm (1GHz ~ 12.75GHz)
Intermodulation	≤ -36dBm (9kHz ~ 1GHz)
	≤ -30dBm (1GHz ~ 12.75GHz)
IMD (at 2dBm pout each @2tone)	≥ 45dB
Return Loss	≥ 14dB
Flatness (for Passband)	± 2.5dB
Noise Figure	≤ 6dB
Impedance	50 (Ohm)
I/O Connector	N-Type Female
Power Supply	AC110V 60Hz / DC 6V, 1.5A